


Helsinki 14.8.2003

Rec'd PCT/PTO 04 DEC 2004

PCT/FI03/00443



ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Telefonaktiebolaget L M Ericsson
Stockholm, SE

Patenttihakemus nro
Patent application no

20021067

Tekemispäivä
Filing date

04.06.2002

Kansainvälinen luokka
International class

H04N

Keksinnön nimitys
Title of invention

"A method for interworking between a number of video communication terminals and a video communication system and a video interactive gateway unit"

(Useiden videoviestintäpäätteiden välinen yhteistyömenetelmä ja videoviestintäjärjestelmä ja yhteistyöyhdyskäytäväyksikkö videolle)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims and drawings originally filed with the Finnish Patent Office.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Marketta Tehikoski
Apulaistarkastaja

Maksu 50 €
Fee 50 EUR

Maksu perustuu kauppa- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite: Arkadiankatu 6 A
P.O.Box 1160
FIN-00101 Helsinki, FINLAND

Puhelin: 09 6939 500
Telephone: + 358 9 6939 500

Telefax: 09 6939 5328
Telefax: + 358 9 6939 5328

A METHOD FOR INTERWORKING BETWEEN A NUMBER OF VIDEO COMMUNICATION TERMINALS AND A VIDEO COMMUNICATION SYSTEM AND A VIDEO INTERACTIVE GATEWAY UNIT

5 Technical field of the invention

The present invention relates in general to video communication networks and more specifically to a method for interworking between a number of video communication terminals, to a video communication system, and to a video interactive gateway unit.

Background of the invention

15 The background of the invention is discussed briefly in the following.

Video Interactive Gateway (VIG) makes it possible for interworking between low bit-rate multimedia terminals (H.324) located in circuit switched telephony network and terminals in IP based multimedia systems (H.323).

For a better understanding of the prior art relation to the present invention reference will be made to the accompanying figures in which:

Figure 1 illustrates a Schemantical Diagram of H.324-H.323 interworking according to prior art.

Figure 2 illustrates Uni-directional Logical Channel signalling procedures according to prior art.

Figure 3 illustrates Bi-directional Logical Channel signalling procedures according to prior art.

Figure 4 illustrates Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to prior art.

Figure 1 illustrates a Schemantical Diagram of H.324-H.323 interworking according to prior art. The circuit switched network may use the 64 kbit/s unrestricted digital bearer for the multimedia connection.

5

Using H.223 as multiplexing protocol different multimedia components, audio, video and data are multiplexed within the bearer. These channels are de-multiplexed by VIG to separate RTP and TCP channels in the IP network, and vice versa. VIG may perform transcoding for different multimedia components if needed to make the communication between end-terminals possible.

ISUP may be used in the circuit switched network as a call control protocol, which is mapped to H.225 protocol in the IP network by VIG.

H.245 is used as a control protocol both in the circuit switched network and in the IP network, providing end to end capability exchange, signalling of command and indications, and messages to open and describe the content of logical channels for different multimedia components.

VIG performs mapping of H.245 messages between circuit switched network and IP network, in order to adapt the different transport protocols and to enable transcoding of media channels.

Further, the interworking capabilities can be used for enabling IP trunking, in case of H.324 to H.324 call. This means that the call is routed to IP-network as close to the terminals as possible. This makes it possible to utilize cheaper transmission costs in the IP network compared to the transmission costs in the ordinary circuit switched telephony network.

As specified in H.245 Open Logical Channel signalling procedures are used for establishing a media channel between terminals. These procedures actually consist of two different procedures, i.e. Uni-directional Logical Channel signalling procedures and Bi-directional Logical Channel signalling procedures.

Uni-directional Logical Channel signalling procedures are used for opening a one-way media channel between the terminals. The originating terminal, which is going to transmit media through the channel, initiates the procedure by issuing Open Logical Channel (OLC) message to remote terminal. The OLC contain description of the media type, the codec to be used, codec options to be used and description of the multiplex layer options to be used, for the channel being opened.

The remote terminal checks if it is able to comply the description of the channel as a receiver. If that is the case it responds with the Open Logical Channel Acknowledge message. When the originating terminal receives the message it can start to transmit the media according to the protocol negotiated in OLC signalling procedure.

Figure 2 illustrates Uni-directional Logical Channel signalling procedures according to prior art. Bi-directional Logical Channel signalling procedures are used for opening a two-way media channel between the terminals. The channel consists of two uni-directional channels, i.e. forward channel and reverse channel.

The originating terminal, which is going to transmit and receive media through the channels, initiates the procedure by issuing Open Logical Channel (OLC) message to remote terminal. The OLC contain description of the media type, the codec to be used, codec options to be used and

description of the multiplex layer options to be used, for the channels being opened both for forward channel i.e. the media which the originating terminal is going to transmit, and for the reverse channel, i.e. for the media which the originating terminal is going to receive.

The remote terminal checks if it is able to comply the description of the channels as a receiver for the forward channel and as a sender for the reverse channel. If that is the case it responds with the Open Logical Channel Acknowledge message.

When the originating terminal receives the message it issues Open Logical Channel Confirm and can start to transmit the media on the forward channel according to the protocol negotiated in OLC signalling procedure. When the terminating terminal receives the message it can start to transmit the media on the reverse channel according to the protocol negotiated in OLC signalling procedures.

Further, H.245 specifies the master slave determination procedure in order to find, which terminal will act as a master and which terminal will act as a slave during the call. This procedure happens in the beginning of the call in order to be able to solve conflicts at logical channel signalling procedure, e.g. both terminals start Bi-directional Logical Channel signalling procedures simultaneously.

Figure 3 illustrates Bi-directional Logical Channel signalling procedures according to prior art. H.323 specifies that Uni-directional channels are used for audio and video channels. This means that the both terminals are supposed to initiate a uni-directional logical channel signalling procedure to open a channel for the media, which they intend to transmit.

H.324 specifies the same for the audio channels. However, it is required that it is mandatory for H.324 terminal to support H.223 adaptation layer 3 for video channel. Since
5 H.223 adaptation layer 3 has bi-directional behaviour, H.324 requires that bi-directional logical channel signalling procedure is used for opening the video channels. In addition to AL3, H.324 terminal may support video channels by using H.223 AL2, which enables to use uni-directional
10 channels.

H.246 specifies the interworking between H.323 and H.324. For Logical Channel Signalling it specifies: "When OpenLogicalChannel (OLC) messages (either unidirectional
15 or bi-directional) are received from the remote endpoint (H.323 or H.324), the gateway should initiate the OLC procedure at the opposite endpoint of the gateway. The Gateway may initiate the OLC procedure before receiving OLC messages."

20 The problems arising from the background solutions are discussed briefly in the following.

In case call is made between H.324M terminal, which does not support H.223 AL2 for video channels, to H.323 terminal,
25 VIG needs to map bi-directional logical channel signalling procedures used on H.324 side to the uni-directional logical channel signalling procedures used on the H.323. However, this causes potential problems for VIG as seen in figure 4.

30 Figure 4 illustrates Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to prior art. Mapping of the procedures creates two fundamental
35 problems.

VIG receives two descriptions for the channel in direction from H.323 terminal to H.324, one from H.324 terminal as reverse channel description, and another from H.323 terminal as forward channel description. Since the fundamental goal is that VIG do not make any transcoding of adaptation on media when ever possible, this situation creates a problem, when the descriptions received from the different terminals do not match with each other. Further, since different procedures are used for opening of the logical channels, there is no straightforward way to relay terminals to negotiate the used description.

OLC ack and OLC conf messages trigger terminals to start transmission of media. It must be guaranteed that the procedures on the both side of VIG are synchronized so that when VIG receives media from a terminal it is able to transfer media forward to another terminal, in order not to loss the media, since this would be hard to recover by terminals for video channels. It has been noticed that some terminals will crash.

There is a clear need for a solution for interworking between a number of video communication terminals that would make it possible to interwork between different terminals e.g. between a low bit-rate multimedia terminal and a packet based multimedia terminal.

Summary of the present invention

It is an object of the present invention to overcome or at least mitigate the disadvantages of the prior art. The present invention provides a method for interworking between a number of video communication terminals, a video communication system, and a video interactive gateway unit.

According to a first aspect of the present invention there is provided a method for interworking between a number of different video communication terminals through a Video Interactive Gateway (VIG) in a video communication system, the video communication system comprising at least one

Video Interactive Gateway unit, at least one low bit-rate multimedia terminal, and at least one packet based multimedia terminal, the method comprising the steps of

- the low bit-rate multimedia terminal sending an Open Logical Channel (OLC) message to the Video Interactive Gateway unit, the Open Logical Channel (OLC) message including a forward channel description and a Reverse channel description,
- the Video Interactive Gateway unit sending an Open Logical Channel (OLC) rejection message to the low bit-rate multimedia terminal, and
- the Video Interactive Gateway unit further sending and/or receiving messages in order to set up video communication between the terminals.

Preferably, when setting up video communication between the terminals,

- the Video Interactive Gateway initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal,
- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward channel description towards the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and

- the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal.

5 Further preferably, when the Video Interactive Gateway receives sends OLC conf to the low bit-rate multimedia terminal when both OLC ack from the low bit-rate multimedia terminal and OLC ack from the packet based multimedia terminal has been received. More preferably, when OLC has not
 10 been received from the packet based multimedia terminal, when OLC ack is received from the packet based multimedia terminal, the Video Interactive Gateway initiates OLC to the low bit-rate multimedia terminal by leaving forward channel description empty. More preferably, when OLC is
 15 received from the packet based multimedia terminal later, VIG closes the already opened channel to the low bit-rate multimedia terminal and opens a new one by using the proper forward channel description.

20 Alternatively, when setting up video communication between the terminals,

- as the Video Interactive Gateway receives OLC first from the the low bit-rate multimedia terminal, it starts a timer,

25 - the Video Interactive Gateway receives OLC from the packet based multimedia terminal,

- the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward channel description towards
 30 the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and that

35 - the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack to-

wards the packet based multimedia terminal and this initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal.

5

Further preferably, when the Video Interactive Gateway sends OLC conf to H.324 when OLC ack from the packet based multimedia terminal is received. More preferably, when OLC has not been received from the packet based multimedia terminal, when the timer expires, VIG initiates OLC to the low bit-rate multimedia terminal by leaving forward channel description empty. More preferably, when OLC is received from the packet based multimedia terminal later, VIG closes the already opened channel to the low bit-rate multimedia terminal and opens a new one by using the proper forward channel description.

Alternatively, when setting up video communication between the terminals,

- 20 - as the Video Interactive Gateway receives OLC first from the the low bit-rate multimedia terminal, it starts a timer,
- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- 25 - the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward and reverse channel description towards the low bit-rate multimedia terminal, and that
- 30 - the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal and this initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the
- 35 the packet based multimedia terminal.

Further preferably, when initiating OLC by using the forward channel description received from the packet based multimedia terminal as reverse channel description towards the low bit-rate multimedia terminal, the Video Interactive Gateway takes into account the request received from the low bit-rate multimedia terminal, and when initiating OLC ack towards the packet based multimedia terminal by using the forward channel description received from the the packet based multimedia terminal, the Video Interactive Gateway takes into account the request received from the low bit-rate multimedia terminal.

Further preferably, when initiating OLC by using the forward channel description received from the packet based multimedia terminal as reverse channel description towards the low bit-rate multimedia terminal, the Video Interactive Gateway takes into account the capability description received from the low bit-rate multimedia terminal, and when initiating OLC ack towards the packet based multimedia terminal by using the forward channel description received from the the packet based multimedia terminal, the Video Interactive Gateway takes into account the capability description received from the low bit-rate multimedia terminal.

Further preferably, when the Video Interactive Gateway receives sends OLC conf to the low bit-rate multimedia terminal when both OLC ack from the low bit-rate multimedia terminal and OLC ack from the packet based multimedia terminal has been received. More preferably, when OLC has not been received from the packet based multimedia terminal, when the timer expires, the Video Interactive Gateway initiates OLC to the packet based multimedia terminal, and as the packet based multimedia terminal acknowledges this, the Video Interactive Gateway initiates OLC to the low bit-rate multimedia terminal by leaving forward channel

description empty. More preferably, when OLC is received from the packet based multimedia terminal later, the Video Interactive Gateway closes the already opened channel to the low bit-rate multimedia terminal and opens a new one by using the proper forward channel description.

According to a second aspect of the present invention there is provided a video communication system, the video communication system comprising at least one Video Interactive Gateway unit, at least one low bit-rate multimedia terminal, and at least one packet based multimedia terminal; wherein

- the low bit-rate multimedia terminal sends an Open Logical Channel (OLC) message to the Video Interactive Gateway unit, the Open Logical Channel (OLC) message including a forward channel description and a Reverse channel description,
- the Video Interactive Gateway unit sends an Open Logical Channel (OLC) rejection message to the low bit-rate multimedia terminal, and
- the Video Interactive Gateway unit further sends and/or receiving messages in order to set up video communication between the terminals.

According to a third aspect of the present invention there is provided a Video Interactive Gateway unit for interworking between a number of different video communication terminals in a video communication system, the video communication system comprising at least one Video Interactive Gateway unit, at least one low bit-rate multimedia terminal, and at least one packet based multimedia terminal, wherein

- the low bit-rate multimedia terminal sends an Open Logical Channel (OLC) message to the Video Interactive Gateway unit, the Open Logical Channel (OLC) message including a

forward channel description and a Reverse channel description,

- the Video Interactive Gateway unit sends an Open Logical Channel (OLC) rejection message to the low bit-rate multimedia terminal, and
- the Video Interactive Gateway unit further sends and/or receiving messages in order to set up video communication between the terminals.

10 Preferably, low bit-rate multimedia terminal is a H.324 terminal and that the packet based multimedia terminal is a H.323 terminal.

Detailed description of certain embodiments

15

The solution according to the present invention presents a new method for interworking between a number of video communication terminals, a new video communication system, and a new video interactive gateway unit.

20

The fundamental idea behind the solution is always ignore the reverse channel description from the H.324 terminal and reject the bi-directional OLC procedure initiated by it and to use the forward channel description received from the H.323 terminal.

25

For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made to the accompanying drawings, in which:

30

Figure 1 illustrates a Schemantical Diagram of H.324-H.323 interworking according to prior art.

Figure 2 illustrates Uni-directional Logical Channel signalling procedures according to prior art.

35

Figure 3 illustrates Bi-directional Logical Channel signalling procedures according to prior art.

Figure 4 illustrates Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to prior art.

5 Figure 5 illustrates one example of Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to the present invention.

10 Figure 6 illustrates another example of Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to the present invention.

15 Figure 7 illustrates a third example of Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to the present invention.

20 Figure 8 illustrates Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to prior art.

The Figures 1 to 4 referring to the prior art have been discussed earlier. In the following, reference is made to the Figures 5-8.

25 Figure 5 illustrates one example of Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to the present invention. The figure 5 shows sequence diagram of the mapping.

30

35 If OLC is received from H.324 terminal first in VIG, VIG rejects the request and initiates OLC towards H.323 terminal by using the forward channel description received from the H.324 terminal.

VIG receives OLC from H.323 terminal. VIG initiates OLC by using the forward channel description received from H.323 terminal as forward channel description towards H.324 terminal; and by using the forward channel description received from the H.324 terminal as the reverse channel description towards H.324 terminal.

VIG receives OLC ack from H.324. This initiates OLC ack towards H.323 terminal. From now on, H.323 may transmit media.

VIG sends OLC conf to H.324 when both OLC ack from H.324 terminal and OLC ack from H.323 terminal has been received.

If OLC has not been received from H.323 terminal, when OLC ack is received from H.323 terminal, VIG initiates OLC to H.324 terminal by leaving forward channel description empty. This may happen if H.323 may not wish or is able to send video, e.g. because of lack of camera.

However, if OLC is received from H.323 terminal later, VIG closes the already opened channel to H.324 terminal and opens a new one by using the proper forward channel description.

In the presented solution according to the present invention, VIG initiates OLC towards H.323 terminal before it receives OLC ack from H.324 terminal. This means that VIG needs to generate and map logical channel numbers in the messages between terminals.

Figure 6 illustrates another example of Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures

according to the present invention. The figure 6 shows sequence diagram of the mapping.

In this second Interworking example there is difference in
5 timing. If OLC is received from H.324 terminal first in
VIG, VIG rejects the request and starts a timer.

VIG receives OLC from H.323 terminal. VIG initiates OLC by
using the forward channel description received from H.323
10 terminal as forward channel description towards H.324 terminal; and by using the forward channel description received from the H.324 terminal as the reverse channel description towards H.324 terminal.

15 VIG receives OLC ack from H.324. This initiates OLC ack towards H.323 terminal and this initiates OLC towards H.323 terminal by using the forward channel description received from the H.324 terminal. From now on, H.323 may transmit media.

20

VIG sends OLC conf to H.324 when OLC ack from H.323 terminal is received.

If OLC has not been received from H.323 terminal, when the
25 timer expires, VIG initiates OLC to H.324 terminal by leaving forward channel description empty. This may happen if H.323 may not wish or is able to send video, e.g. because of lack of camera.

30 However, if OLC is received from H.323 terminal later, VIG closes the already opened channel to H.324 terminal and opens a new one by using the proper forward channel description.

In this second solution according to the present invention, there is a timer, which delays the set-up a little bit in case H.323 terminal do not initiates OLC.

5 Figure 7 illustrates a third example of Interworking between Bi-directional Logical Channel signalling procedures and Uni-directional Logical Channel signalling procedures according to the present invention. The figure 7 shows sequence diagram of the mapping.

10

The fundamental idea in the third Interworking example is to use Forward Channel Description from H.323 terminal for both channels. If OLC is received from H.324 terminal first in VIG, VIG starts a timer.

15

VIG receives OLC from H.323 terminal. VIG initiates OLC by using the forward channel description received from H.323 terminal as forward and reverse channel description towards H.324 terminal. VIG also rejects the original request from H.324 terminal.

20

VIG receives OLC ack from H.324. This initiates OLC ack towards H.323 terminal and this initiates OLC towards H.323 terminal by using the forward channel description received from the H.324 terminal. From now on, H.323 may transmit media.

25

VIG sends OLC conf to H.324 when OLC ack from H.323 terminal is received.

30

If OLC has not been received from H.323 terminal, when the timer expires, VIG initiates OLC to H.323 terminal. When H.323 acknowledges this, VIG initiates OLC to H.324 terminal by leaving forward channel description empty. This may happen if H.323 may not wish or is able to send video, e.g. because of lack of camera.

35

However, if OLC is received from H.323 terminal later, VIG closes the already opened channel to H.324 terminal and opens a new one by using the proper forward channel description.

In this third solution according to the present invention, it is possible to use the same video channel properties, e.g. video codec options in both directions of video channels.

10

Figure 8 illustrates a videoconference trunking over IP network according to the present invention.

When IP network is desired to be used for trunking calls between two H.324 terminals, the call chain contains two VIGs as seen in the figure 8. This creates a potential problems to the solutions described above.

It could happen that H.324 terminal 1 triggers the bi-directional OLC signalling first. This would be mapped to uni-directional OLC signalling by VIG₁. This would trigger VIG₂ to initiate bi-directional OLC signalling to H.324 terminal 2. If OLC is received by H.324 terminal 2 before it would initiate its own OLC procedure towards VIG₂, the video channel from H.324 terminal 2 to H.324 terminal 1 would not be established. Therefore a solution to overcome this problem is needed and shown below.

The idea to solve the problem above is to not perform mapping between bi-directional OLC signalling procedures and uni-directional OLC procedures in case of trunking. In order to know that VIG is involved in trunking, it uses the end-point-type information in H.323 call control signalling H.225. If that information contains information about gateway as an end-point, VIG interprets this as an indica-

tion that trunking is the case and thus VIG will pass bi-directional logical channel signalling through IP-network.

5 The present solution makes it possible to interwork between different terminals e.g. between a low bit-rate multimedia terminal and a packet based multimedia terminal.

10 It makes it possible to inter-work between H.323 terminal and H.324 terminal by using just the mandatory parts of the respectively specifications.

5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211

Claims

1. A method for interworking between a number of different video communication terminals through a Video Interactive Gateway (VIG) in a video communication system, the video communication system comprising at least one Video Interactive Gateway unit, at least one low bit-rate multimedia terminal, and at least one packet based multimedia terminal, characterized in that the method comprises the steps of
 - the low bit-rate multimedia terminal sending an Open Logical Channel (OLC) message to the Video Interactive Gateway unit, the Open Logical Channel (OLC) message including a forward channel description and a Reverse channel description,
 - the Video Interactive Gateway unit sending an Open Logical Channel (OLC) rejection message to the low bit-rate multimedia terminal, and
 - the Video Interactive Gateway unit further sending and/or receiving messages in order to set up video communication between the terminals.
2. An interworking method according to claim 1, characterized in that in setting up video communication between the terminals,
 - the Video Interactive Gateway initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal,
 - the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
 - the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward channel description towards the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-

rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and that

- the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal.

3. An interworking method according to claim 2, characterized in that the Video Interactive Gateway receives sends OLC conf to the low bit-rate multimedia terminal when both OLC ack from the low bit-rate multimedia terminal and OLC ack from the packet based multimedia terminal has been received.

4. An interworking method according to claim 2, characterized in that in case OLC has not been received from the packet based multimedia terminal, when OLC ack is received from the packet based multimedia terminal, the Video Interactive Gateway initiates OLC to the low bit-rate multimedia terminal by leaving forward channel description empty.

5. An interworking method according to claim 2, characterized in that in case OLC is received from the packet based multimedia terminal later, VIG closes the already opened channel to the low bit-rate multimedia terminal and opens a new one by using the proper forward channel description.

6. An interworking method according to claim 1, characterized in that in setting up video communication between the terminals,
- as the Video Interactive Gateway receives OLC first from the the low bit-rate multimedia terminal, it starts a timer,

- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward channel description towards the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and that
- the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal and this initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal.

7. An interworking method according to claim 6, characterized in that the Video Interactive Gateway sends OLC conf to H.324 when OLC ack from the packet based multimedia terminal is received.

8. An interworking method according to claim 6, characterized in that in case OLC has not been received from the packet based multimedia terminal, when the timer expires, VIG initiates OLC to the low bit-rate multimedia terminal by leaving forward channel description empty.

9. An interworking method according to claim 6, characterized in that in case OLC is received from the packet based multimedia terminal later, VIG closes the already opened channel to the low bit-rate multimedia terminal and opens a new one by using the proper forward channel description.

10. An interworking method according to claim 1, characterized in that in setting up video communication between the terminals,

- as the Video Interactive Gateway receives OLC first from the the low bit-rate multimedia terminal, it starts a timer,
- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward and reverse channel description towards the low bit-rate multimedia terminal, and that
- the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal and this initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the the packet based multimedia terminal.

20

11. An interworking method according to claim 10, characterized in that

- when initiating OLC by using the forward channel description received from the packet based multimedia terminal as reverse channel description towards the low bit-rate multimedia terminal, the Video Interactive Gateway takes into account the request received from the low bit-rate multimedia terminal, and that
- when initiating OLC ack towards the packet based multimedia terminal by using the forward channel description received from the the packet based multimedia terminal, the Video Interactive Gateway takes into account the request received from the low bit-rate multimedia terminal.

35

12. An interworking method according to claim 10 or to claim 11, characterized in that

- when initiating OLC by using the forward channel description received from the packet based multimedia terminal as reverse channel description towards the low bit-rate multimedia terminal, the Video Interactive Gateway

5 takes into account the capability description received from the low bit-rate multimedia terminal, and that

- when initiating OLC ack towards the packet based multimedia terminal by using the forward channel description received from the the packet based multimedia terminal,

10 the Video Interactive Gateway takes into account the capability description received from the low bit-rate multimedia terminal.

13. An interworking method according to any of the

15 claims 10-12, characterized in that the Video Interactive Gateway receives sends OLC conf to the low bit-rate multimedia terminal when both OLC ack from the low bit-rate multimedia terminal and OLC ack from the packet based multimedia terminal has been received.

20

14. An interworking method according to any of the

claims 10-12, characterized in that in case OLC has not been received from the packet based multimedia terminal, when the timer expires, the Video Interactive Gateway initiates OLC to the packet based multimedia terminal, and as

25 the packet based multimedia terminal acknowledges this, the Video Interactive Gateway initiates OLC to the low bit-rate multimedia terminal by leaving forward channel description empty.

30

15. An interworking method according to any of the

claims 10-12, characterized in that in case OLC is received from the packet based multimedia terminal later, the Video Interactive Gateway closes the already opened

35 channel to the low bit-rate multimedia terminal and opens a new one by using the proper forward channel description.

16. An interworking method according to any of the claims 1-15, characterized in that the low bit-rate multimedia terminal is a H.324 terminal and that the packet based multimedia terminal is a H.323 terminal.

17. A video communication system, the video communication system comprising at least one Video Interactive Gateway unit, at least one low bit-rate multimedia terminal, and at least one packet based multimedia terminal, characterized in that

- the low bit-rate multimedia terminal sends an Open Logical Channel (OLC) message to the Video Interactive Gateway unit, the Open Logical Channel (OLC) message including a forward channel description and a Reverse channel description,
- the Video Interactive Gateway unit sends an Open Logical Channel (OLC) rejection message to the low bit-rate multimedia terminal, and
- the Video Interactive Gateway unit further sends and/or receiving messages in order to set up video communication between the terminals.

18. A video communication system according to claim 17, characterized in that in setting up video communication between the terminals,

- the Video Interactive Gateway initiates OLC towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal,
- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward channel description towards the low bit-rate multimedia terminal, and by using the

forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and that

- 5 - the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal.

19. A video communication system according to claim 17, characterized in that in setting up video communication between the terminals,

- as the Video Interactive Gateway receives OLC first from the the low bit-rate multimedia terminal, it starts a timer,
- 15 - the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward channel description towards
- 20 the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and that
- 25 - the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal.

30

20. A video communication system according to claim 17, characterized in that in setting up video communication between the terminals,

- as the Video Interactive Gateway receives OLC first from
- 35 the the low bit-rate multimedia terminal, it starts a timer,

- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
 - the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward and reverse channel description towards the low bit-rate multimedia terminal, and that
 - the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal and this initiates OLC towards the packet based multimedia terminal 1 by using the forward channel description received from the the low bit-rate multimedia terminal.
21. A video communication system according to any of the claims 17-20, characterized in that the low bit-rate multimedia terminal is a H.324 terminal and that the packet based multimedia terminal is a H.323 terminal.
22. A Video Interactive Gateway unit for interworking between a number of different video communication terminals in a video communication system, the video communication system comprising at least one Video Interactive Gateway unit, at least one low bit-rate multimedia terminal, and at least one packet based multimedia terminal, characterized in that
- the low bit-rate multimedia terminal sends an Open Logical Channel (OLC) message to the Video Interactive Gateway unit, the Open Logical Channel (OLC) message including a forward channel description and a Reverse channel description,
 - the Video Interactive Gateway unit sends an Open Logical Channel (OLC) rejection message to the low bit-rate multimedia terminal, and

- the Video Interactive Gateway unit further sends and/or receiving messages in order to set up video communication between the terminals.

5 23. A Video Interactive Gateway unit according to claim 22, characterized in that in setting up video communication between the terminals,

- the Video Interactive Gateway initiates OLC towards the packet based multimedia terminal by using the forward
10 channel description received from the the low bit-rate multimedia terminal,
- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the
15 forward channel description received from the packet based multimedia terminal as forward channel description towards the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description
20 towards the low bit-rate multimedia terminal, and that

- the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal.

25

24. A Video Interactive Gateway unit according to claim 22, characterized in that in setting up video communication between the terminals,

- as the Video Interactive Gateway receives OLC first from
30 the the low bit-rate multimedia terminal, it starts a timer,
- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,
- the Video Interactive Gateway initiates OLC by using the
35 forward channel description received from the packet based multimedia terminal as forward channel description towards

the low bit-rate multimedia terminal, and by using the forward channel description received from the the low bit-rate multimedia terminal as the reverse channel description towards the low bit-rate multimedia terminal, and

5 that

- the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal by using the forward channel description received from the the low bit-rate multimedia terminal.

10

25. A Video Interactive Gateway unit according to claim 22, characterized in that in setting up video communication between the terminals,

15 - as the Video Interactive Gateway receives OLC first from the the low bit-rate multimedia terminal, it starts a timer,

- the Video Interactive Gateway receives OLC from the packet based multimedia terminal,

20 - the Video Interactive Gateway initiates OLC by using the forward channel description received from the packet based multimedia terminal as forward and reverse channel description towards the low bit-rate multimedia terminal, and that

25 - the Video Interactive Gateway receives OLC ack from the low bit-rate multimedia terminal and initiates OLC ack towards the packet based multimedia terminal and this initiates OLC towards the packet based multimedia terminal 1 by using the forward channel description received from the

30 the low bit-rate multimedia terminal.

26. A Video Interactive Gateway unit according to any of the claims 22-25, characterized in that the low bit-rate multimedia terminal is a H.324 terminal and that the

35 packet based multimedia terminal is a H.323 terminal.

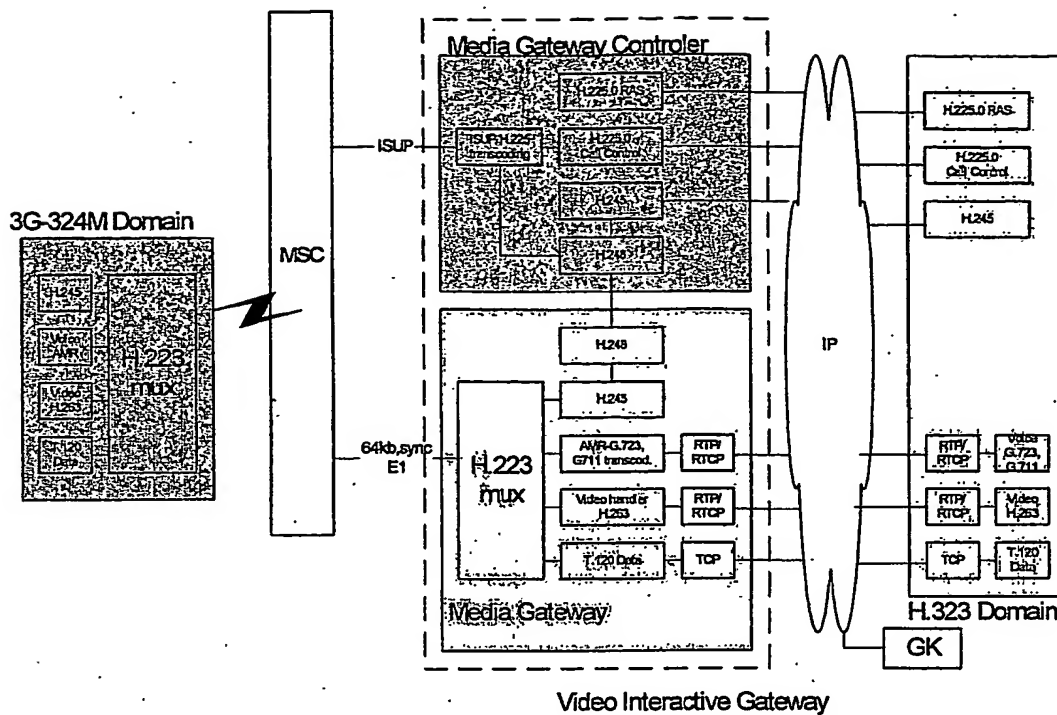


Figure 1

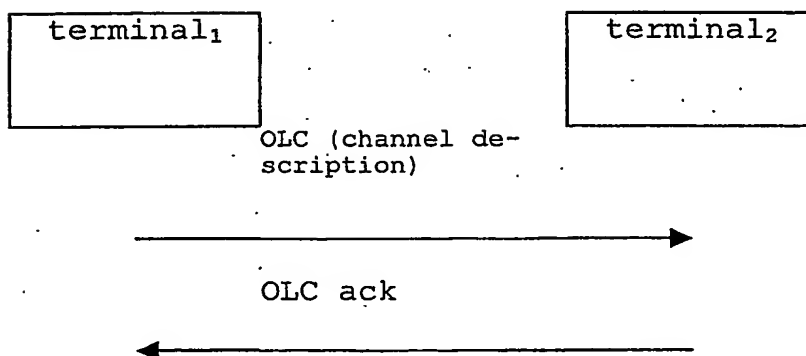


Figure 2

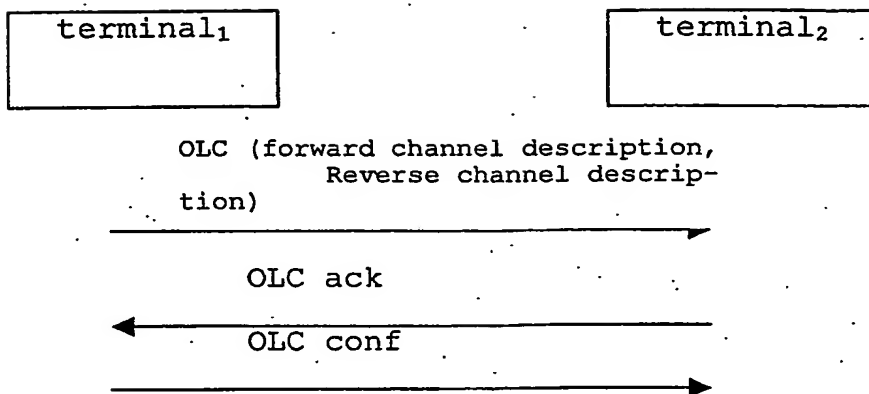


Figure 3

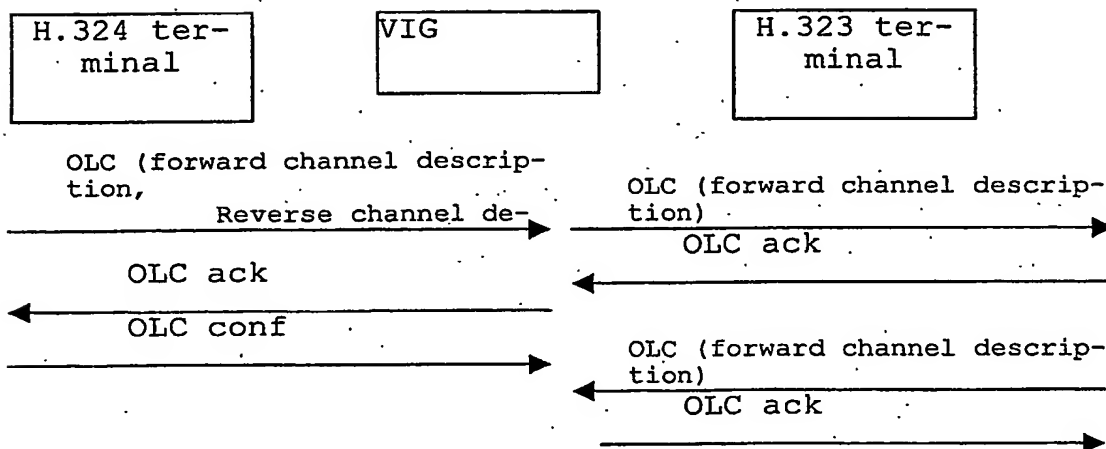


Figure 4

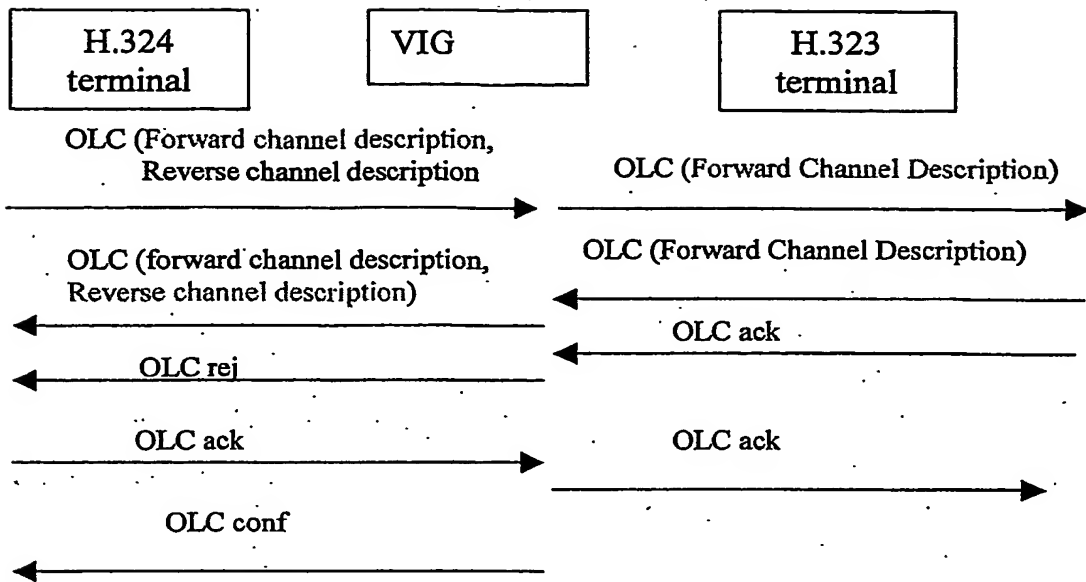


Figure 5

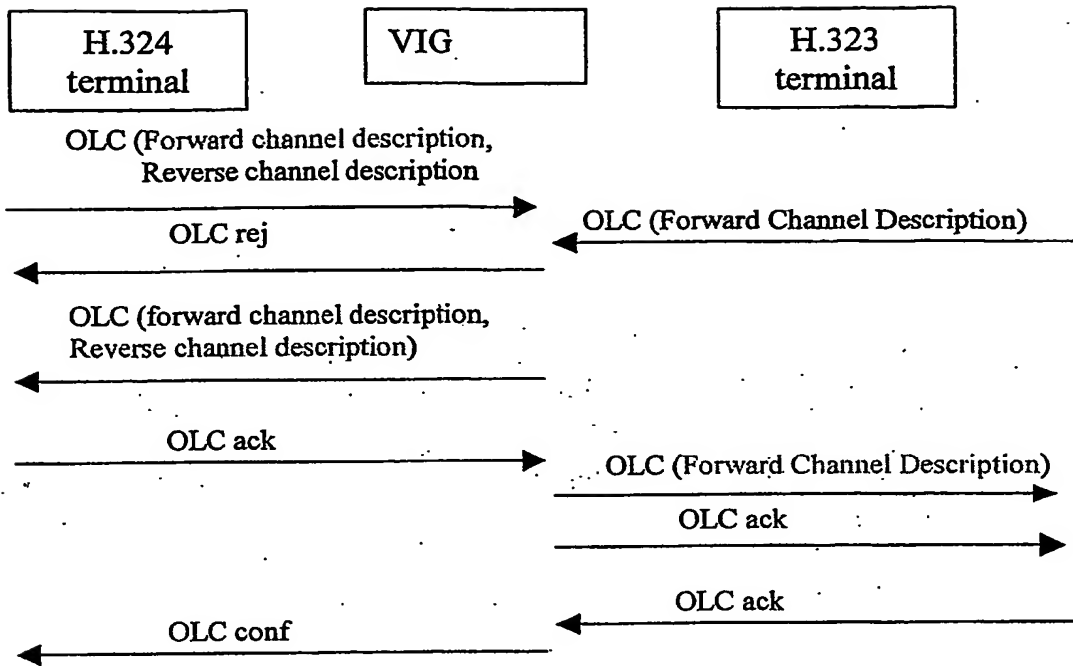


Figure 6

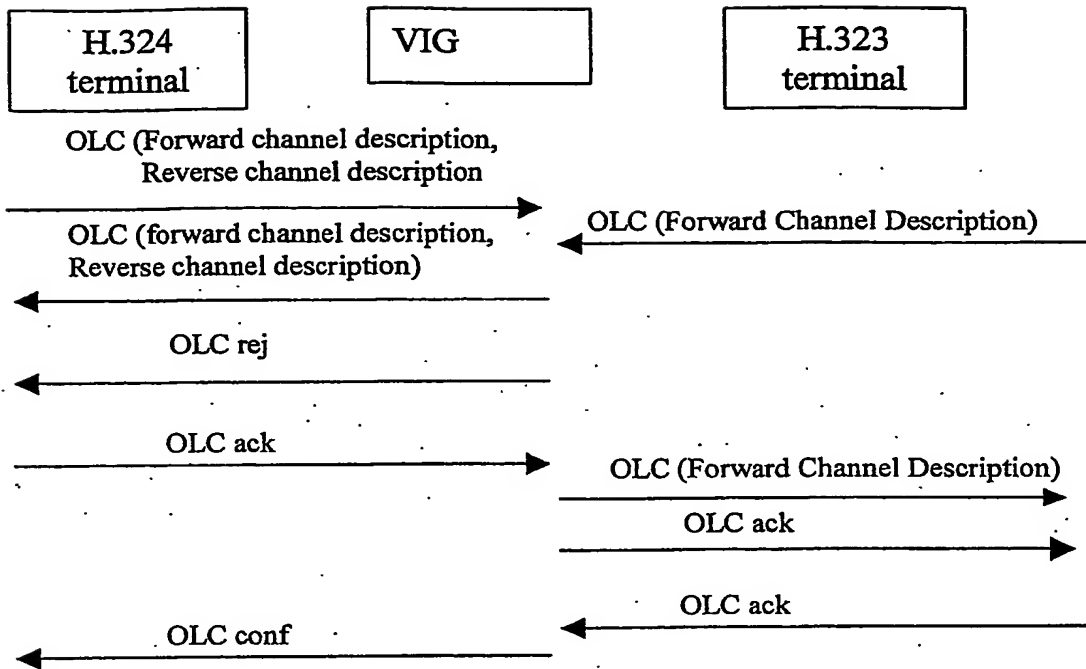


Figure 7

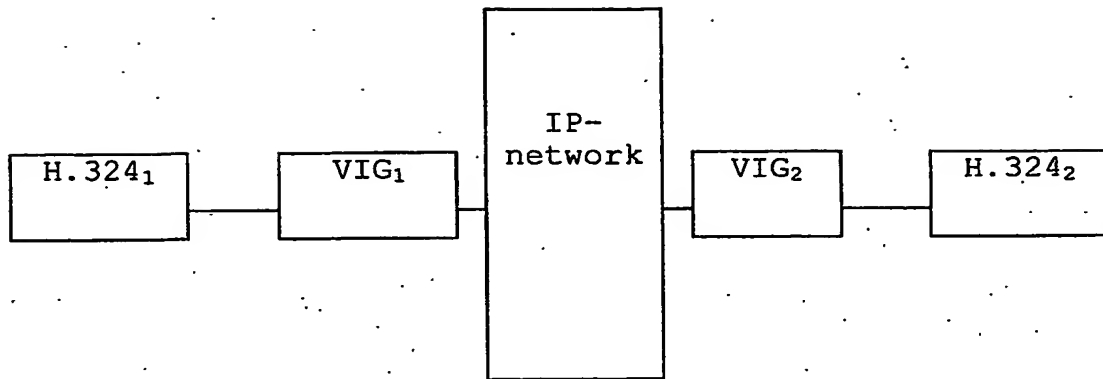


Figure 8